

SPECIFICATION
ES-LED-RGBW-M

PROJECT	DATE
TYPE	QTY



LED Controller & Remote

INTELLIGENT SERIES



ACTUAL SIZE

DESCRIPTION:

The ES-LED-RGBW M series LED controller can work with up to 10 remotes which means using just one controller can achieve single color/CT dimming, and RGB/RGBW adjustment to meet different lighting requirements. The RF remote controls single colors, brightness, and speed. You can also customise and save color and light changing modes.

REMOTE SPECIFICATIONS:

- Working Voltage: 3V DC(battery CR2032)
- Working Frequency: 433.92MHz
- Remote Distance: 30m
- Working Temp.: -30°C ~ 55°C
- Weight (N.W.): 42g

CONTROLLER SPECIFICATIONS:

- Input Voltage: 5~24V DC
- Max Current Load: 5A×4CH Max 20A
- Max Output Power: 100W/240W/480W(5V/12V/24V)
- Working Temp.: -30°C~55°C
- Weight(N.W.): 125g



ORDERING

MODEL

ES-LED-RGBW-M

LED Controller and Remote

epiXsky
A Division of Impact Lighting Inc.




2814 Silver Star Rd., Orlando, Florida 32808 • Ph. 1-800-507-5714 • Email: sales@epixsky.com


epixsky.com

USER GUIDE
ES-LED-RGBW-M

LED Controller & Remote

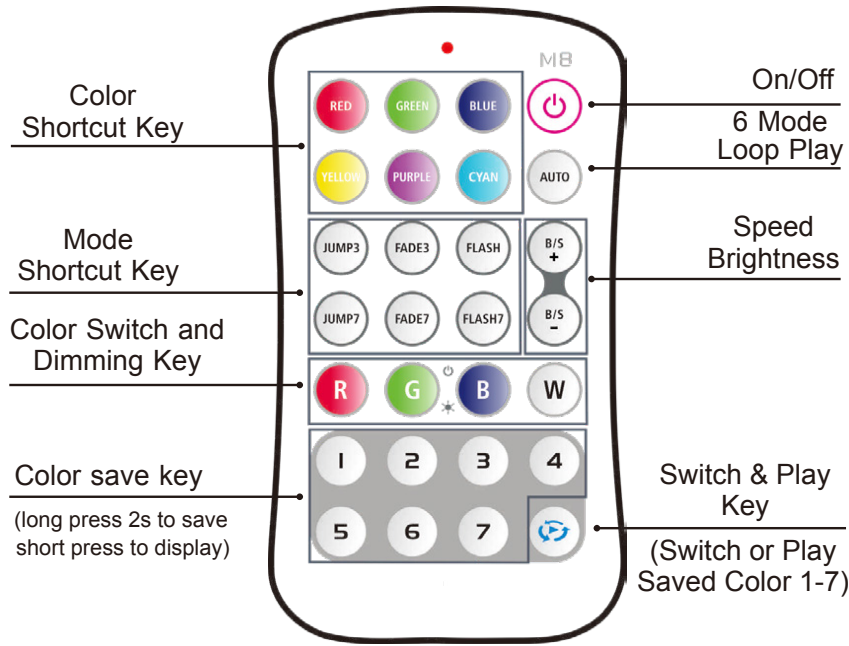

E.g. 1: Connected 12V lamp, loads 1~240W (5A×4CH×12V).

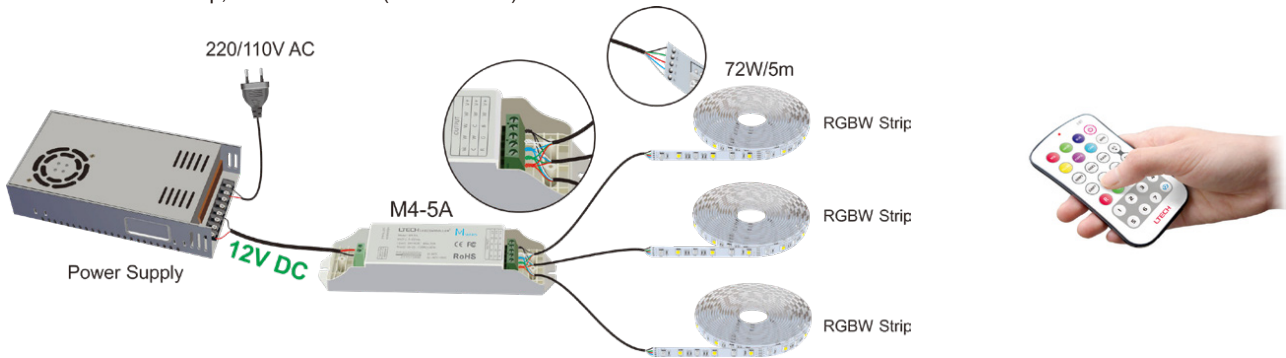

E.g. 2: Connected 24V lamp, loads 1~480W (5A×4CH×24V).

