

SPECIFICATION  
**IL-TG-RGB-5050-60**  
 THINGLOW SERIES

PROJECT	DATE
TYPE	QTY



**FLEXIBLE LED STRIPS FOR COVE AND STEP LIGHTING**

**INDOOR RGB**

**IL-TG-RGB-5050-60-IP20**

- IP20 (Non-Waterproof) SMD 5050 Flexible LED Strip
- LED Qty: 60LED s/m
- Dimensions: 500mm x 10mm x 0.22mm
- Voltage: DC12/24V
- Power Consumption: (12V/24) 14.4 W/m
- 3/6 LED cuttable
- Dimmable with suitable driver or controller


**OUTDOOR RGB**

**IL-TG-RGB-5050-60-IP68**


- IP68 (Waterproof) SMD 5050 Flexible LED Strips, Silicone Tube + Silicone Glue
- LED Qty: 60LED s/m
- PCB Dimension: 500mm x 10mm x 0.22mm
- Voltage: DC12/24V
- Power Consumption: (12V/24) 14.4 W/m
- 3/6 LED cuttable
- Dimmable with suitable driver or controller



**RGB - 5050 - 12V - 60LED/m - 14.4 W/m**

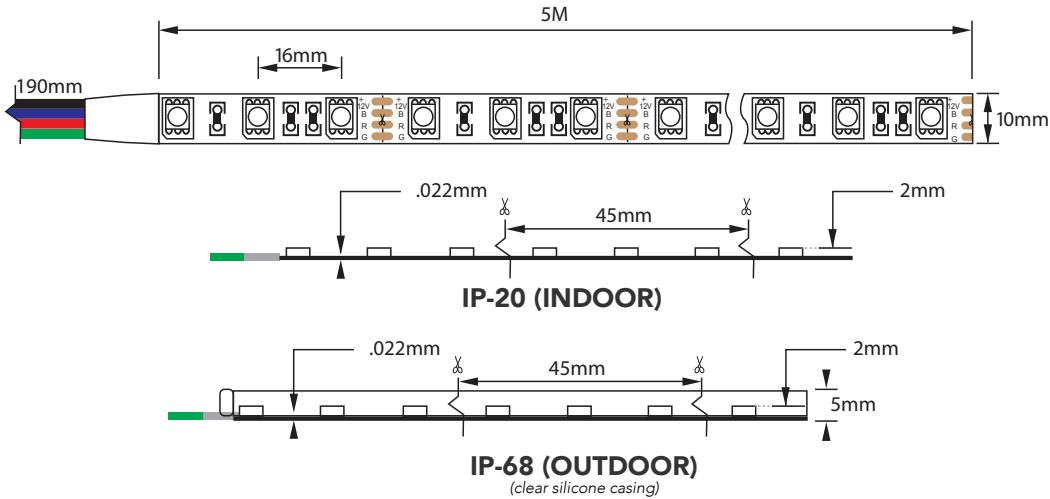

**RGB - 5050 - 24V - 60LED/m - 14.4W/m**

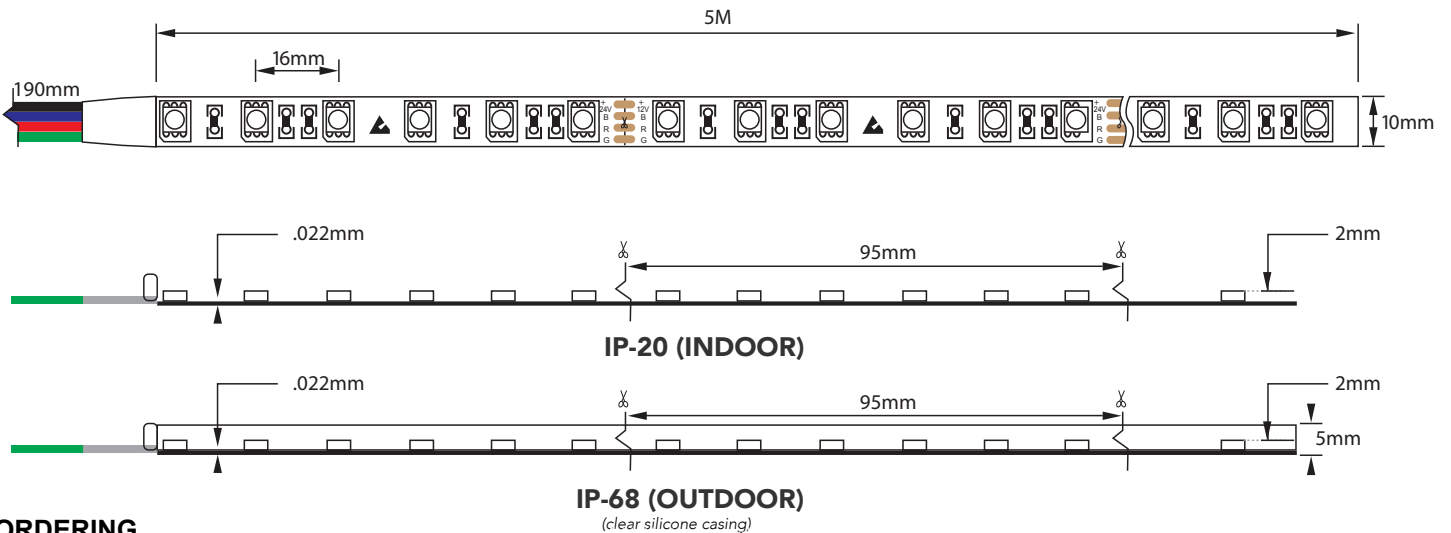

**ORDERING**

MODEL	IP Rating	Voltage	No. Reels
<b>IL-TG-RGB-5050-60</b>			
ThinGlow™ RGB-5050 60 LED/m Flexible LED Strip	20 - IP20 68 - IP68	12 - 12V 24 - 24V	Write number of reels needed above



A Division of Impact Lighting Inc.



2814 Silver Star Rd., Orlando, Florida 32808 • Ph. 1-800-507-5714 • Email: sales@epixsky.com

epixsky.com